

## Altai A8in (ac) Super WiFi Base Station

The world's leading 802.11ac WiFi outdoor access point with integrated base station, antennas and RF cabling optimized for long range 360-degree access coverage and with the highest possible throughput using a minimum number of installation sites. It is the A8in model with the 5 GHz radio upgraded to 802.11a/n/ac standards.



One of the benefits of A8in (ac) is its simple installation design – the RF cabling work is no longer necessary, no extra installation is required.

The A8in (ac) is a multi-radio base station utilizing 8x8 MIMO smart antenna technologies and a patented signal processing algorithm to provide the industry's best coverage per base station, especially in non-line-of sight (NLOS) environments. Using up to 80% fewer access points than standard Wi-Fi systems to cover the same area enables less complex network design.

### Super Long Range and High Throughput Coverage

Max. LOS CPE	2.7 km (2.4 GHz) 1.7 km (5 GHz)
Max. LOS Smartphones	1 km (2.4 GHz) 900 m (5 GHz)
Max. LOS Backhaul	30 km (5 GHz)
Max. Data Rate	300 + 867 Mbps


## Altai A8in (ac) for Wireless Broadband

The Altai A8in (ac) serves as last mile infrastructure for a wide range of wireless broadband access applications. It provides low deployment cost and fast provisioning of Wi-Fi systems with the greatest coverage and bandwidth per installed base station.



## Altai A8in (ac) for Super 3G/4G Offload

The A8in (ac) Super WiFi Base Station can be deployed in conjunction with existing 3G mobile networks to provide low cost high bandwidth mobile data offloading solution. The A8in (ac) can be co-located with existing 3G cell sites allowing immediate Wi-Fi provisioning.

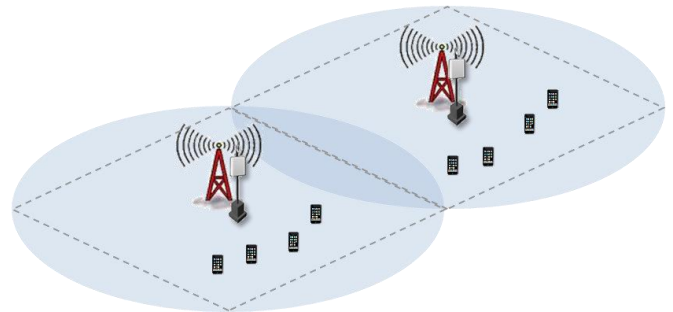

Co-locate A8in (ac) with existing 3G/LTE cell site to offload traffic for an almost identical cell area.

### As an integral part of our Super WiFi network infrastructure, key benefits of the Altai A8in (ac) include:

- Base station and antenna in one integrated unit, eliminating RF cabling work. Simple installation at rooftop, lamppost, tower, wall and indoor environments
- High 11ac throughput capacity up to 1,167 Mbps data rate
- Extended coverage in a Non-Line-of-Sight (NLOS) environment which matches the foot print of most 3G deployments in dense urban environments
- Multi-beam 8x8:2 MIMO Smart Antenna Technology to provide superior signal strength and link budget in dense urban environment deployments
- 2.4 GHz and 5 GHz dual band concurrent access
- Backhaul redundancy and access link safe mode
- Adaptive interference control mitigates the influence from surrounding interfering sources
- Standard 802.11b/g/n access and 802.11a/n/ac access/ backhaul
- Giga Ethernet or integrated 802.11a/n/ac wireless backhaul
- Remote configuration through the Altai Wireless Management System (AWMS) or AltaiCare network management solution

## Wireless Interface

### 802.11b/g/n (8x8:2) Radio

- Operating Mode Access Point
- Standard IEEE 802.11b/g/n
- Operating Frequency 2.400 – 2.484 GHz (Ch 1-13)
- Transmit Power 27 dBm (Max.); 5 – 24 dBm (Per Chain) in 1 dB step
- Receiver Sensitivity (Typical)
 

802.11b	11 Mbps	-90 dBm;	1 Mbps	-95 dBm
802.11g	54 Mbps	-80 dBm;	6 Mbps	-93 dBm
802.11n	HT20	-94 dBm;	HT40	-89 dBm
- 8 Built-in Antennas
- Interference Mitigation

### 802.11a/n/ac (2x2:2) Radio

- Operating Mode AP/ Bridge/ Repeater
- Standard IEEE 802.11a/n/ac
- Operating Frequency 5.150 – 5.350 GHz  
5.470 – 5.725 GHz  
5.725 – 5.850 GHz
- Transmit Power 29 dBm (Max.)  
26 dBm (Per Chain)
- Receiver Sensitivity (Typical)
 

802.11a	54 Mbps	-79 dBm;	6 Mbps	-92 dBm
802.11n	HT20	-92 dBm;	HT40	-89 dBm
802.11ac	VHT20	-92 dBm;	VHT40	-89 dBm;
	VHT80	-87 dBm		

### For both 2.4 and 5 GHz

- 32 SSID (Max. 16 SSID per Radio)
- 802.11h\*, 802.11k\*, 802.11r\*, 802.11v\*, 802.11w\*
- Hotspot 2.0
- Altai AirFi™ Throughput Optimization
- Band Steering
- WMM (802.11e)

## Antenna

### 2.4 GHz Antenna

- Built-in Antenna 14 dBi (Max.) Sector
- Frequency 2.4 – 2.5 GHz
- Polarization Dual Slant ±45°
- Horizontal Beamwidth 360° (-3 dB, Overall)
- Vertical Beamwidth 14° (-3 dB)
- Fixed Down Tilt 5.5°
- VSWR 2 (Max.)
- Impedance 50 Ω
- Front-to-back Ratio -25 dB (Max.)
- Isolation Between Ports 20 dB (Min.)

### 5 GHz Antenna (Optional Accessories)

- External Antenna 20 dBi Panel/ 9 dBi Omni/  
16 dBi 100° Sector
- Antenna Port 2 x N-female

## Networking

- Switch (Bridge) and Gateway Mode
- IPv4/ IPv6 Dual-stack
- NAT
- DHCP Client/ Server
- PPPoE Client
- VPN (IPsec)\*
- VLAN
- Bandwidth Control Per VAP/ Client
- Multicast Rate Filter/IGMP Snooping

## Security

- Authentication – Open system, Shared key, WPA/ WPA-PSK, WPA2/ WPA2-PSK, 802.1x (EAP-PEAP/ TLS/ TTLS/ SIM/ AKA)
- Encryption – WEP, TKIP, AES
- Inter/ Intra-client Isolation
- MAC-based Access Control (White/ Black List)
- RADIUS
- Active directory
- Firewall\*
- WIPS\*

## Management

- Cloud or Server-based Management by AltaiCare
- Controller-based Management by Access Controller
- Web User Interface
- Command Line Interface (SSH)
- SNMP v1/ v2c / v3\*
- MIB2/ IF-MIB/ Altai Enterprise MIB
- Syslog
- Auto Channel Selection and TX Power Control
- Spectral Analysis\*
- KPI Monitoring\*
- Client OS Detection\*

## Physical Specification

- Dimension 455 x 431 x 163 mm
- Weight 8 kg (Unit Weight) /  
10.5 kg (Gross Weight)
- Mounting Pole or Wall-mounted
- Network Interface 10/100/1000 Mbps Ethernet Port

## Power Supply

- Power Supply 56V Passive PoE PD or -48V DC PoE Injector
- Power Consumption 30 W (Typical) / 65 W (Max.)

## Environmental Specification

- Operating Temperature -40 °C to +60 °C (Ambient)  
-10 °C to +40 °C (PoE Injector)
- Storage Temperature -40 °C to +85 °C
- Humidity 5 to 100% (Condensing)
- Lightning Protection EN 61000-4-5
- Wind Loading Up to 216 km/h (134 mph)
- Weatherproof IP67 Compliant

## Certification

- FCC / CE / Others\*

## Product Ordering Information

### Standard Package

- A8in (ac) Super WiFi Base Station (Model No.: WA8011NAC-H)
- Built-in Smart Antennas
- Mounting Accessories and PoE Injector (Order Separately)

### Contact Us

- Email: sales@altaitechnologies.com

\* Will be available in future.

A8in(ac)-PB-160727

The coverage range will be varied depending on NLOS and interference conditions. The transmit power may be varied according to country regulation. Although Altai has attempted to provide accurate information in these materials, Altai assumes no legal liability for the accuracy and completeness of the information. All specifications are subject to change without notice.