

**Altai C1nL Super WiFi CPE/AP**

The Altai C1nL WiFi CPE/AP is designed as an essential component in the Altai Super WiFi system to extend outdoor WiFi coverage into indoor areas for broadband connectivity or use as an AP for pico coverage.



The Altai C1nL employs patented smart signal processing algorithms and antenna design to increase WiFi signal strength (transmit and receive) in areas covered by an A8n Super WiFi Base Station or A2 WiFi Access Point. It can be installed exactly where the throughput is required to boost up, and it allows the service operator to increase the coverage range of an A8n base station substantially and provides greater flexibility and cost savings to WiFi deployments.

**Long Range Coverage**

LOS Access	400 m
Data Rate	300 Mbps

**Control Traffic Throughput Flexibly**

From day one, the C1nL is designed and purpose-built for service operators. Its built-in traffic shaping based bandwidth control mechanism allows the control of uplink and downlink traffic throughput on a per-client or per-VAP basis. A full set of networking and management features are available to meet carriers' requirements.



**Altai C1nL for Wireless Broadband**

The C1nL is a key component in wireless broadband access provisioning. It can be installed outdoors by the side of a window, mounted to a wall, at the rooftop of a building or placed at the desktop inside for fixed broadband access provisioning.

**Altai C1nL for Access Point**

The C1nL can also be used as a standalone WiFi access point for smaller networks supporting 802.11b/g/n clients. It is an important solution to complement the large coverage and high throughput of an A8n series Super WiFi Base Station and A2 Access Point to improve WiFi performance.

**As an integral part of our Super WiFi network infrastructure, the Altai C1nL differentiates others with:**

- Features built-in for carriers including per client/VAP based bandwidth control, remote web-based management and client association status
- ±45° dual slant patch antennas are optimized to match with the Altai A8n/A2 series antennas.
- High performance antenna with 20 dB front-to-back ratio, which is on average 5 dB better than others in directional transmission without picking up unwanted signal
- One-piece weatherproof chassis compliant to IP55 standard for direct outdoor installation
- 8-level LED for easy alignment in the strongest signal direction
- Increase signal strength for both NLOS and LOS coverage areas
- Improve data transmission rate and throughput utilization of base station

## Wireless Interface

### 802.11b/g/n (2x2) Radio

- Operating Mode AP/ CPE
- Standard IEEE 802.11b/g/n
- Operating Frequency 2.400 – 2.484 GHz (Ch 1-13)
- Transmit Power 29 dBm (Max.)
- Receiver Sensitivity (Typical)
 

802.11b	11 Mbps	-91 dBm
	1 Mbps	-96 dBm
802.11g	54 Mbps	-81 dBm
	6 Mbps	-95 dBm
802.11n	HT20	-95 dBm
	HT40	-92 dBm
- 16 SSID (Max.)
- WDS
- Altai AirFi™ Throughput Optimization
- Automatic Channel Selection (with Scheduling)
- WMM
- Preferred AP Association

### Antenna

- Built-in 2.4 GHz Antenna 5 dBi Dual Slant ±45° Patch
- Horizontal Beamwidth 70° (-3 dB)
- Vertical Beamwidth 30° (-3 dB)
- Front-to-back Ratio -20 dB (Max.)

## Networking

- VLAN
- IPv4/ IPv6 Dual-stack
- Switch (Bridge) and Gateway Mode
- DHCP Client/ Server
- NAT
- PPPoE Client
- Bandwidth Control Per VAP/ Client
- Multicast Rate Filter/ IGMP Snooping
- Port Forwarding

## Security

- Authentication – Open system, Shared key, WPA/ WPA-PSK, WPA2/ WPA2-PSK, 802.1x (EAP-PEAP/ TLS/ TTLS/ SIM/ AKA)
- Encryption – WEP, TKIP, AES
- RADIUS Client (PAP, CHAP)
- RADIUS Accounting
- Inter/ Intra-client Isolation
- MAC-based Access Control (White/ Black List)
- SSID Suppression
- WAPI

## Management

- Cloud-based Management by AltaiCare
- Server-based Management by AWMS
- Controller-based Management by Access Controller
- Web User Interface
- Command Line Interface (SSH)
- 3-level User Login
- Remote Firmware Upgrade (HTTP, TFTP)
- SNMP v1/ v2c
- MIB2/ IF-MIB/ Altai Enterprise MIB
- Performance Statistics/ Alarm Information Display
- WiFi Client Association/ Disassociation Statistics
- Syslog

## Physical Specification

- Dimension 242 x 80 x 27 mm (excluding mounting)
- Weight 0.4 kg
- Mounting Desktop, Pole, Wall or Window-mounted
- Network Interface 10/100 Mbps Ethernet Port
- LED Display Main Power Status  
Ethernet Status  
8-level Signal Strength (User configurable)

## Power Supply


- Power Source PoE Injector (18V)
- Power Consumption 6 W (Typical) / 8W (Max.)

## Environmental Specification


- Operating Temperature -20 °C to +55 °C
- Storage Temperature -40 °C to +80 °C
- Humidity 5 – 95% (Non-condensing)
- Wind Loading Up to 200 km/h (124 mph)
- Weatherproof Outdoor UV Stabilized Plastic IP55 Compliant

## Antenna Pattern (Built-in Antennas)

-45°

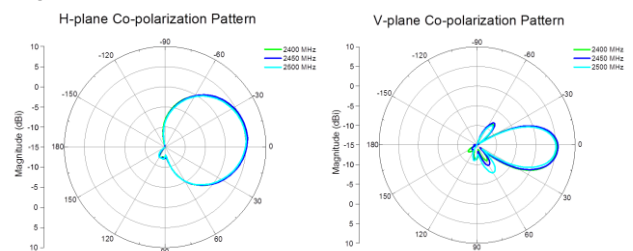

+45°

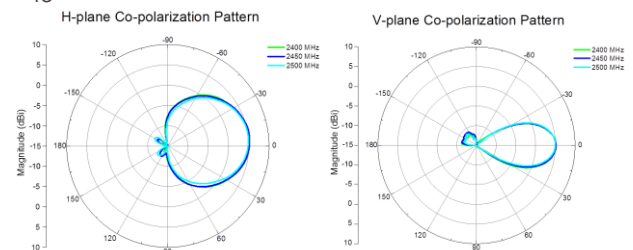

## Certification

- FCC\*/ CE\*/ Others\*

## Product Ordering Information

### Standard Package

- C1nL Super WiFi CPE/AP With Built-in 2.4 GHz Patch Antennas (Model No.: WA1011N-GL)
- DC Injector and AC Adaptor
- Wire Clamp
- Power Cord (EU plug)
- Table Stand (optional)

### Contact Us

- Email: sales@altaitechnologies.com

\* Will be available in future.

C1nL-PB-150428

The coverage range will be varied depending on NLOS and interference conditions. The transmit power may be varied according to country regulation. Although Altai has attempted to provide accurate information in these materials, Altai assumes no legal liability for the accuracy and completeness of the information. All specifications are subject to change without notice.