

Electrical Specifications

- Impedance 50 Ω
- Frequency Range DC to 6 GHz
- VSWR 2.0 (Max.) @DC to 6 GHz
- Insertion Loss (Max.) 1.8 dB @DC to 3 GHz
2.0 dB @3 to 6 GHz
- Insertion Loss (Typical) 0.539 dB @1 GHz
0.742 dB @2 GHz
1.386 dB @3 GHz
1.421 dB @4 GHz
1.243 dB @5 GHz
1.480 dB @6 GHz
- Type ULA 168
- Cable Length 1 m


Mechanical Specifications

- Operating Temperature -40 °C to +85 °C
- Weight 65 g


Material Specifications

- All materials and surface finishing comply with RoHS directives


Dimensions Diagram

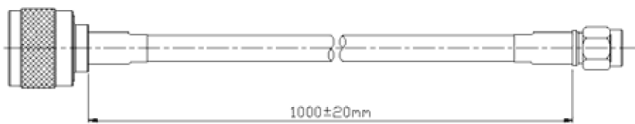

VSWR Characteristics

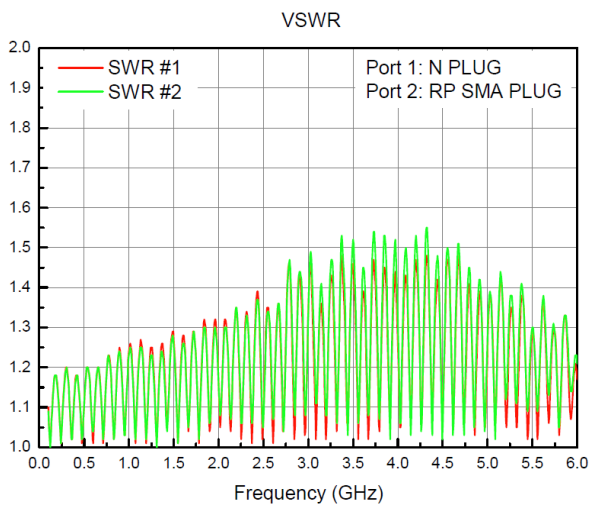

Insertion Loss Characteristics

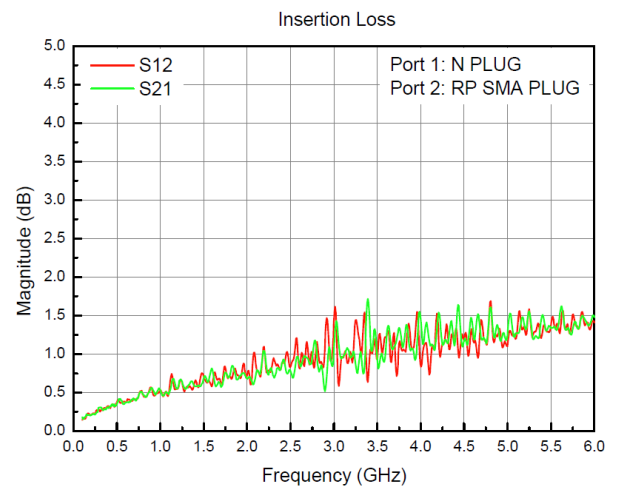

Product Ordering Information

- 1-meter RF Cable, RP-SMA to N Connector

Contact Us

- Email: sales@altaittechnologies.com

CA-PB-140729

Although Altai has attempted to provide accurate information in these materials, Altai assumes no legal liability for the accuracy and completeness of the information. All specifications are subject to change without notice. The photo is for reference only.