


### Altai A3-Ei Outdoor 802.11ac 3x3 Access Point

The Altai A3-Ei Dual-band 3x3 WiFi Access Point is designed to be used in Altai Super WiFi systems to provide high capacity 2.4 GHz and 5 GHz dual-band dual-concurrent access coverage for both outdoor and indoor areas, and to increase system capacity, extend coverage, fill-in areas of low or blocked signals caused by obstructions. It is capable of providing the highest possible data throughput and capacity that the 802.11ac 3x3 3-stream MIMO standards can offer.



### Altai A3-Ei for Dual-band Wireless Access

The A3-Ei can be used for wireless broadband access for both the residential users and commercial customers. It supports concurrent 2.4 GHz and 5 GHz dual-band operations, and is a cost effective and flexible solution which supports long access range with an Altai C1n or C1an CPE for 2.4 GHz and 5 GHz operation respectively.

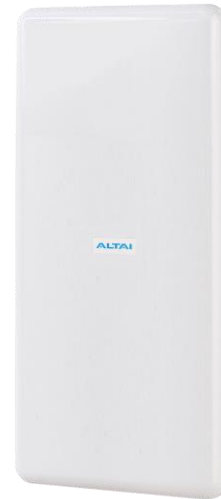

### Super Dual-band Coverage


Max. LOS CPE	3 km (2.4 GHz) 2 km (5 GHz)
Max. LOS Smartphones	1 km (2.4 GHz) 800 m (5 GHz)
Max. LOS Bridge	11 km (5 GHz)
Max. Data Rate	450 + 1300 Mbps

### Altai A3-Ei for Dual-band Micro Coverage

The A3-Ei has both a high capacity 2.4 GHz (3x3:3 802.11b/g/n) radio and a 5 GHz (3x3:3 802.11a/n/ac) radio which can be operated at the same time for 2.4 GHz and 5 GHz dual-band dual-concurrent access coverage. The dual-band operations not only provide the highest capacity up to 1.75 Gbps but also perform better in the less interfered 5 GHz frequency band.

### Extra High Capacity PTP/PTMP Bridging

The A3-Ei supports up to 1.3 Gbps data rate high capacity PTP/PTMP bridging, fulfilling extra high throughput, high user capacity and fully IP-67 weatherproof bridging requirements. This is commonly used for hub site bridging such as campus network, city network or surveillance.

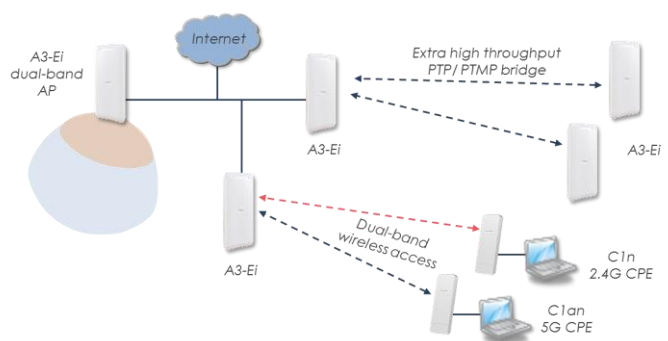

### As an integral part of our Super WiFi network infrastructure, key benefits of the Altai A3-Ei include:

- Multi-operating modes allowed: AP, bridge, repeater mode or CPE
- 3x3:3 MIMO for both 2.4 GHz (802.11b/g/n) and 5 GHz (802.11a/n/ac) radios
- Built-in 2.4 GHz and 5 GHz 3x3 spatial polarized high gain sector antennas
- High capacity 1300 Mbps in 5 GHz and 450 Mbps in 2.4 GHz
- 2.4 GHz and 5 GHz dual-band dual concurrent access
- IP-67 rated carrier grade dual-band AP for both outdoor and indoor applications
- Fill-in coverage area in challenging RF environment
- Light weight with built-in lightning protection
- Easy installation & web-based management

## Wireless Interfaces

### 802.11b/g/n (3x3:3) Radio

- Operating Mode AP/CPE/Repeater
- Standard IEEE 802.11b/g/n
- Operating Frequency 2.400 – 2.484 GHz (Ch 1-13)
- Transmit Power 30 dBm (Max.)  
25 dBm (Per Chain)
- Receiver Sensitivity (Typical)
 

802.11b	11 Mbps	-90 dBm;	1 Mbps	-100 dBm
802.11g	54 Mbps	-79 dBm;	6 Mbps	-92 dBm
802.11n	HT20	-92 dBm;	HT40	-88 dBm

### 802.11a/n/ac (3x3:3) Radio

- Operating Mode AP/CPE/Bridge/Repeater
- Standard IEEE 802.11a/n/ac
- Operating Frequency 5.150 – 5.350 GHz  
5.470 – 5.725 GHz  
5.725 – 5.850 GHz
- Transmit Power 30 dBm (Max.)  
25 dBm (Per Chain)
- Receiver Sensitivity (Typical)
 

802.11a	54 Mbps	-79 dBm;	6 Mbps	-93 dBm
802.11n	HT20	-94 dBm;	HT40	-90 dBm
802.11ac	VHT20	-93 dBm;	VHT40	-90 dBm
	VHT80	-87 dBm		

### For both 2.4 and 5 GHz

- 32 SSID (16 SSID per Radio)
- WMM, 802.11h, 802.11k, 802.11r, 802.11v, 802.11w
- Passpoint (Release 2)
- Fast Roaming
- Band Steering/Multi-AP Steering
- Smart Load Balancing
- Dual-Radio 1+1 Redundancy\*
- Smart Mesh Networking\*
- Auto Channel Selection and TX Power Control
- Bandwidth Control Per SSID/Client
- Altai AirFi™ Throughput Optimization

## Antennas

### 2.4 GHz Antenna

- Built-in Antenna 12 dBi Sector
- Frequency 2.4 – 2.5 GHz
- Polarization 3x3 MIMO Spatial Polarized
- Horizontal Beamwidth 60° (-3 dB)
- Vertical Beamwidth 25° (-3 dB)
- VSWR 2 (Max.)

### 5 GHz Antenna

- Built-in Antenna 13 dBi Sector
- Frequency 5.150 – 5.875 GHz
- Polarization 3x3 MIMO Spatial Polarized
- Horizontal Beamwidth 80° (-3 dB)
- Vertical Beamwidth 12° (-3 dB)
- VSWR 2 (Max.)

## Networking

- Switch (Bridge) and Gateway Mode
- IPv4/IPv6 Dual-Stack
- NAT
- DHCP Client/Server
- PPPoE Client
- Soft-GRE
- VLAN
- Multicast Rate Filter/IGMP Snooping

## Security

- Authentication – Open, Shared key, WPA/WPA-PSK, WPA2/WPA2-PSK, WPA3\*, 802.1x (EAP-PEAP/TLS/TLS/SIM/AKA)
- Encryption – WEP, TKIP, AES
- Inter/Intra-SSID Client Isolation
- MAC-based Access Control (White/Black List)
- RADIUS/Active directory
- Dynamic VLAN Assignment
- Firewall
- WIDS/WIPS
- Broadcast/Multicast/Unicast Flooding Control

## Management

- Management Platforms: Standalone, AltaiGate, AltaiCare, AltaiCare Appliance
- Web User Interface
- Command Line Interface (SSH)
- Remote Factory Reset
- Trusted Management IP List
- SNMP v1/v2c /v3
- MIB2/IF-MIB/Altai Enterprise MIB
- Syslog
- Spectral Analysis\*
- KPI Monitoring\*
- Client OS and Hostname Detection

## Physical Specifications

- Dimension 491 x 221 x 73mm
- Weight 2.1 kg (Without Mounting Kit)
- Mounting Pole or Wall-mounted
- Network Interface 10/100/1000 Mbps Ethernet Port

## Power

- Power Supply 802.3at PoE PD or 56 VDC  
Passive PoE PD
- Power Consumption 10 W (Typical)/25 W (Max.)

## Environmental Specifications

- Operating Temperature -40 °C to +60 °C (Ambient)
- Storage Temperature -40 °C to +80 °C
- Humidity Up to 95% (Non-Condensing)
- Lightning Protection EN 61000-4-5
- Wind Loading Up to 216 km/h (134 mph)
- Weatherproof IP67 Compliant

## Certifications

- FCC/CE/Others
- RoHS Compliance

## Product Ordering Information

### A3-Ei (Part No.: SD.A3-EH00-00)

#### Standard Package

- A3-Ei Dual-band 3x3 802.11ac WiFi AP with Built-in 2.4 GHz and 5 GHz Sector Antennas (Model No.: WA3311NAC-E)
- Mounting Kit

#### Accessories

- 56 VDC Passive PoE Injector (Optional)

#### Contact Us

- Email: sales@altaitechnologies.com

A3Ei-PB-191213

\*Will be available in the future.

The coverage range will vary depending on NLOS and interference conditions  
The transmit power may vary according to country regulation